

AMENDMENT OF SOLICITATION/MODIFICATION OF CONTRACT			1. CONTRACT ID CODE		PAGE OF PAGES 1 4		
2. MODIFICATION NO.: 0004		3. EFFECTIVE DATE APR 02, 2003		4. REQUISITION/PURCHASE REQ. NO. W81W3G-2035-7181		PROJECT NO. (If applicable)	
6. ISSUED BY Department of the Army Baltimore District, Corps of Engineers Contracting Division P.O. Box 1715 Baltimore MD 21203-1715		CODE CA31		7. ADMINISTERED BY: Contracting Division, Contracts Branch CENAB-CT-C 10 S. Howard ST. Room 7000 Baltimore, MD 21203-1715		CODE E1P0100	
8. NAME AND ADDRESS OF CONTRACTOR (No., street, county, State and ZIP Code)				(x)		9A. AMENDMENT OF SOLICITATION NO. DACW31-03-R-0003	
				X		9B. DATED (SEE ITEM 11) JAN 13, 2003	
						10A. MODIFICATION OF CONTRACT/ ORDER NO.	
						10B. DATED (SEE ITEM 13)	
CODE		FACILITY CODE					

11. THIS ITEM ONLY APPLIES TO AMENDMENTS OF SOLICITATIONS

The above numbered solicitation is amended as set forth in Item 14. The hour and date specified for receipt of Offers **is not extended.**

DATE OF RECEIPT OF PROPOSALS

POSTPONED INDEFINITELY

Offers must acknowledge receipt of this amendment prior to the hour and date specified in the solicitation or as amended, by one of the following methods:

(a) By completing Items 8 and 15, and returning 1 copies of the amendment; (b) By acknowledging receipt of this amendment on each copy of the offer submitted; or (c) By separate letter or telegram which includes a reference to the solicitation and amendment numbers. FAILURE OF YOUR ACKNOWLEDGMENT TO BE RECEIVED AT THE PLACE DESIGNATED FOR THE RECEIPT OF OFFERS PRIOR TO THE HOUR AND DATE SPECIFIED MAY RESULT IN REJECTION OF YOUR OFFER. If by virtue of this amendment you desire to change an offer already submitted, such change may be made by telegram or letter, provided each telegram or letter makes reference to the solicitation and this amendment, and is received prior to the opening hour and date specified.

12. ACCOUNTING AND APPROPRIATION DATA (If required)

**13. THIS ITEM APPLIES ONLY TO MODIFICATIONS OF CONTRACTS/ORDERS,
IT MODIFIES THE CONTRACT/ORDER NO. AS DESCRIBED IN ITEM 14.**

A. THIS CHANGE ORDER IS ISSUED PURSUANT TO: (Specify authority) THE CHANGES SET FORTH IN ITEM 14 ARE MADE IN THE CONTRACT ORDER No. ITEM 10A	
B. THE ABOVE NUMBERED CONTRACT/ORDER IS MODIFIED TO REFLECT THE ADMINISTRATIVE CHANGES (such as changes in paying office, appropriation date, etc.) SET FORTH IN ITEM 14, PURSUANT TO THE AUTHORITY OF FAR43.103(b)	
C. THIS SUPPLEMENTAL AGREEMENT IS ENTERED INTO PURSUANT TO AUTHORITY OF: changes clause FAR 52.243.1	
D. OTHER (Specify type of modification and authority)	

E. IMPORTANT: Contractor is not, is required to sign this document and return copies to the issuing office.

14. DESCRIPTION OF AMENDMENT/MODIFICATION (Organized by UCF section headings, including solicitation/contract subject matter where feasible.)

**STADIUM IMPROVEMENTS
ANACOSTIA SENIOR HIGH SCHOOL, WASHINGTON, DC**

SEE THE FOLLOWING PAGES

Except as provided herein, all terms and conditions of the document referenced in Item 9A or 10A, as heretofore changed, remains unchanged and in full force and effect

15A. NAME AND TITLE OF SIGNER (Type or print)		16A. NAME AND TITLE OF CONTRACTING OFFICER (Type or print)	
15B. CONTRACTOR/OFFEROR (signature of person authorized to sign)	15C. DATE SIGNED	16B. UNITED STATES OF AMERICA BY (Signature of Contracting Officer)	16C. DATE SIGNED

AMENDMENT NO. 0004 TO ADVERTISED RFP DACW31-03-R-0003
EFFECTIVE APR 02, 2003

SPECIFICATIONS:

- 1) Sections 01010 and 11230: Delete these sections in their entirety and substitute the attached revised like-numbered sections, dated, Mar 24, 2003
- 2) Page 13125-3, Par. 2.2 A 6 a: Revise to read as follows:
“a. Riser per row 8 inches, depth per row 24 inches.”
- 3) Page 13125-3, Paragraph 2.2 A 7: Revise to read as follows:
“7. Guardrailing: To be at all sides of bleacher, entry stairs and ramps, portals, and landings. Railing to be anodized aluminum with end plugs at end of straight runs and/or elbows at corner. All guardrails shall be secured to angle rail risers by galvanized fasteners. Railing shall be 42” above any adjacent seat. Guardrailing on sides and back shall include picket railing with 4” spacing.”

DRAWINGS:

- 4) Sheets C-03, C-04, C-05, A-13, A-14, A-20, M-01, M-02, M-03, E-01, E-02, E-03, and E-04: Delete these sheets in their entirety and substitute the attached revised like-numbered sheets, dated, 3-24-03
- 5) Sheet C-02: The dimensions and points of bearing on this sheet shall be superseded by those in the attached Sketch SK-C-1, dated March 25, 2003.
- 6) Sheet C-07: Revise this sheet by deleting the note “Phase II (N.I.C)” and the accompanying arrows.
- 7) Sheet C-08:
 - a) Delete the note, “PHASE 1 – ALL ROUGH GRADING.”
 - b) Add the following General Note to the Partial Site Grading Plan: “All Rough Grading in existing Parking Lot is in PHASE 3 construction.”
- 8) Sheet C-12: Revise Part 2A, “CONSTRUCTION SEQUENCING”, of the “PROJECT NARRATIVE” to read as follows:
“A. CONSTRUCTION SEQUENCING
 - (i) Construction Sequence 1 consists of Site Demolition of Structures and Utilities as indicated on Sheet C-3
 - (ii) Construction Sequence 2 consists of work required for Excavation and Grading, as”

AMENDMENT NO. 0004 TO ADVERTISED RFP DACW31-03-R-0003
EFFECTIVE APR 02, 2003

well as construction of foundations required for PHASE 1

Construction Sequence 3 involves construction of Bleachers, Structures, Track Lanes and other appurtenances necessary for the completion of PHASE 1.”

9) Sheet A-01:

- a) Delete Detail 4.
- b) Revise the 4’-0” concrete walk around the track’s perimeter to 3’-0.”
- c) Add General Notes 1 and 2.

“1. Details 1 and 2 are in Phase 1 of construction.

2. Details 5, 7, 8 and 9 are in Phase 3 of construction.”

d) Phasing on attached Sketch SK-A1 , dated March 25, 2003, supercedes that shown on Sheet A-01 plan.

10) Sheet A-02:

- a) Revise the 4’-0” concrete walk around the track’s perimeter to 3’-0.”
- b) Delete the 4’-0” high fence along the track.
- c) Delete Detail 2/A2-A2 “FENCE ALONG THE TRACK.”

11) Sheet A-03:

- a) Revise this sheet by deleting the note “PHASE III ALL PAVINGS & CURBS.”
- b) Revise note “PHASE III” to read “PHASE III N.I.C.”

12) Sheet S-09:

a) Revise Detail 1/S9 in accordance with the attached Sketch SK-S-1, dated March 25, 2003.



b) Revise Note R13 to read the following: “Shoring and Sheet Piling shall be employed to prevent damage to existing structures, pavement and trees beyond the property line and inside the property line as required. Shoring and Sheet Piling shall be designed by the General Contractor and installed from within the property lines of Anacostia Senior High School.”

AMENDMENT NO. 0004 TO ADVERTISED RFP DACW31-03-R-0003
EFFECTIVE APR 02, 2003

ATTACHMENTS:

- 1) Revised Sheets C-03, C-04, C-05, A-13, A-14, A-20, M-01, M-02, M-03, E-01, E-02, E-03, and E-04, dated, 3-24-03
- 2) Sketches SK-C-1, SK-A-1, and SK-S-1, dated March 25, 2003.

PHASES

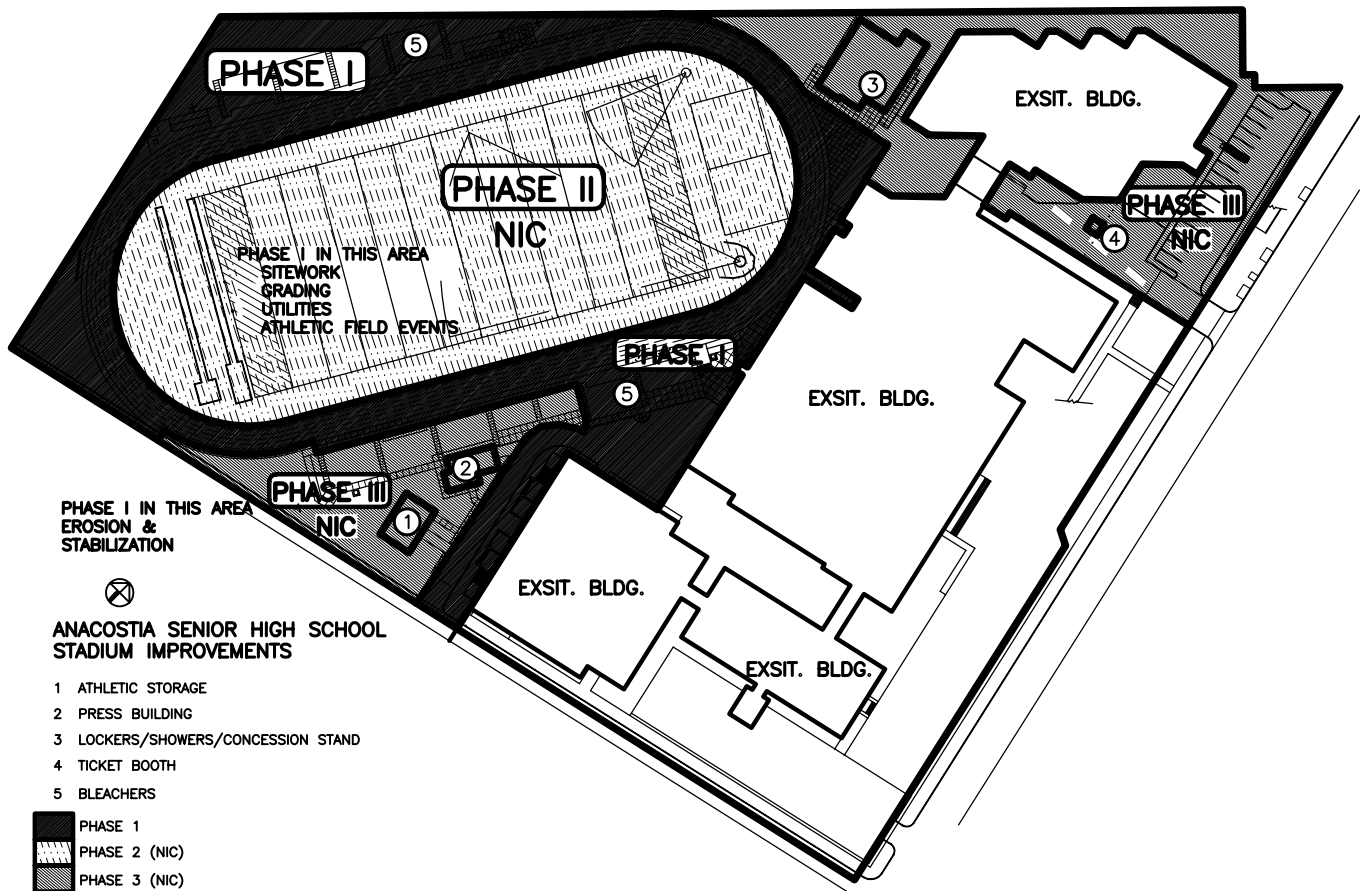

PROJECT PHASES

SCALE: N.T.S

STADIUM IMPROVEMENTS ANACOSTIA SENIOR HIGH SCHOOL

BRYANT ASSOCIATES, PC — ARCHITECTS
1420 N. ST. NW. WASHINGTON D.C. 20005

CIVIL ENGINEERS:
M/E/P ENGINEERS:
COST ESTIMATORS:
LAND SURVEYOR:


EDTS, Inc.
George Worsley & Assoc.
S.C. Meyers & Assoc.
Vyfhuis & Assoc.

DATE: 3-24-03
REV:

ISSUED VIA:

SK - A
1

DWG REF:

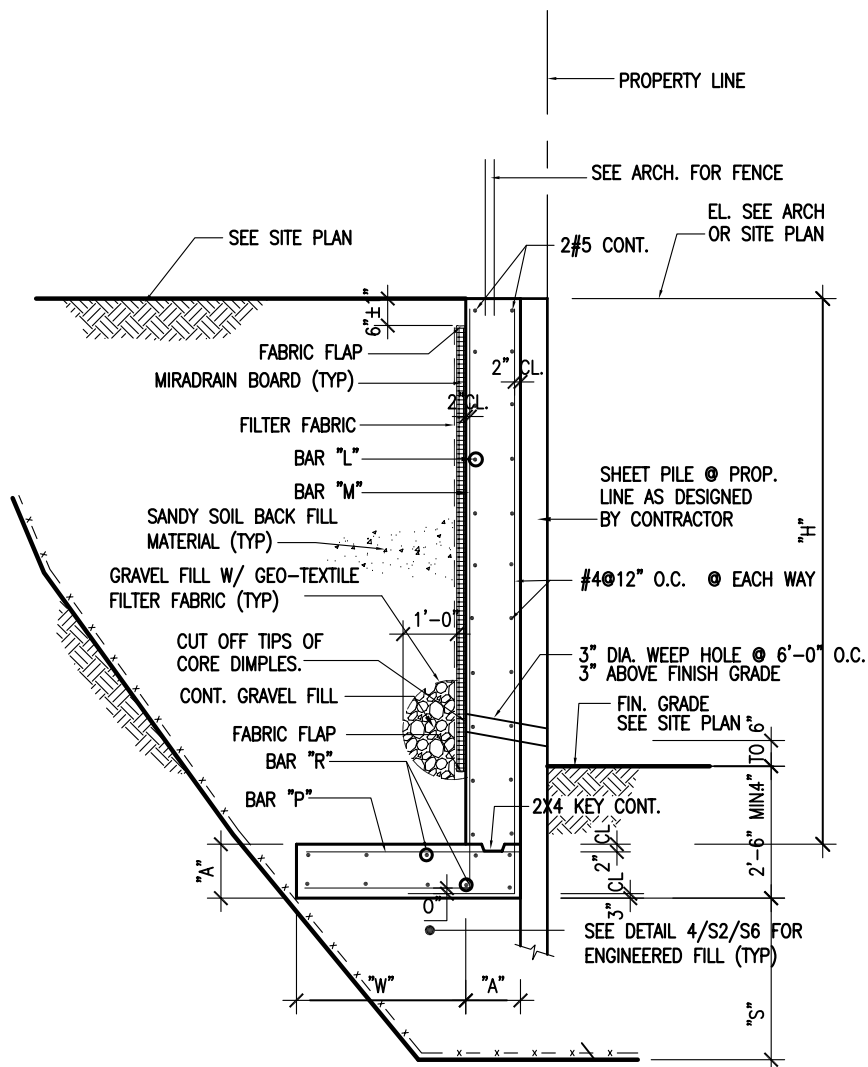

1 RETAINING WALL DET. S9 S9 SCALE: N.T.S

NOTES:

1. SUBDRAIN FILTER FABRIC SHALL BE CONTINUOUS.
2. PROVIDE TENSION LAP SPLICE CLASS "B" FOR ALL VERTICAL BARS IF REQUIRES LAP SPLICE.
3. 4" DIA PERFORATED PIPE SHALL BE CONTINUOUS AND CONNECT STORM SEWER OR DAY LIGHT SPILL. COORDINATE WITH SITE PLAN

STADIUM IMPROVEMENTS
ANACOSTIA SENIOR HIGH SCHOOL

BRYANT ASSOCIATES, PC - ARCHITECTS
1420 N. ST. NW. WASHINGTON D.C. 20005

CIVIL ENGINEERS:
M/E/P ENGINEERS:
COST ESTIMATORS:
LAND SURVEYOR:

EDTS, Inc.
George Worsley & Assoc.
S.C. Meyers & Assoc.
Vyfhuis & Assoc.

DATE: 3-24-03
REV:

ISSUED VIA:

SK - S
1

DWG REF: